


The **NDF9070** is a low-loss, wide band SAW filter in a surface-mount ceramic **DCC6C** case for GSM Tx etc.

1. Package Dimension (DCC6C)

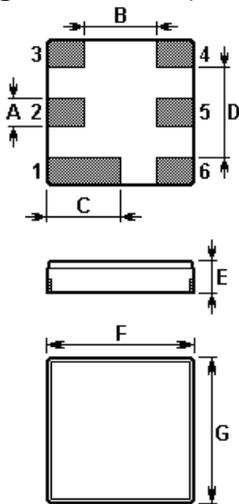

Pin	Configuration
2	Input
5	Output
1, 3, 4, 6	Ground


Sign	Data (unit: mm)	Sign	Data (unit: mm)
A	0.6	E	1.1
B	1.5	F	3.0
C	1.5	G	3.0
D	1.8		

2. Marking


NDF9070

Laser Marking

3. Matching Circuit

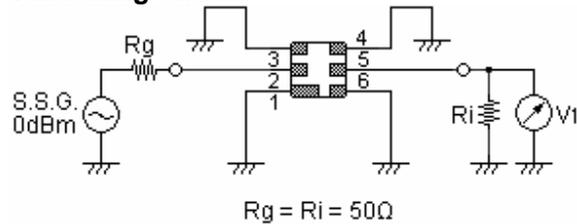

4. Typical frequency response

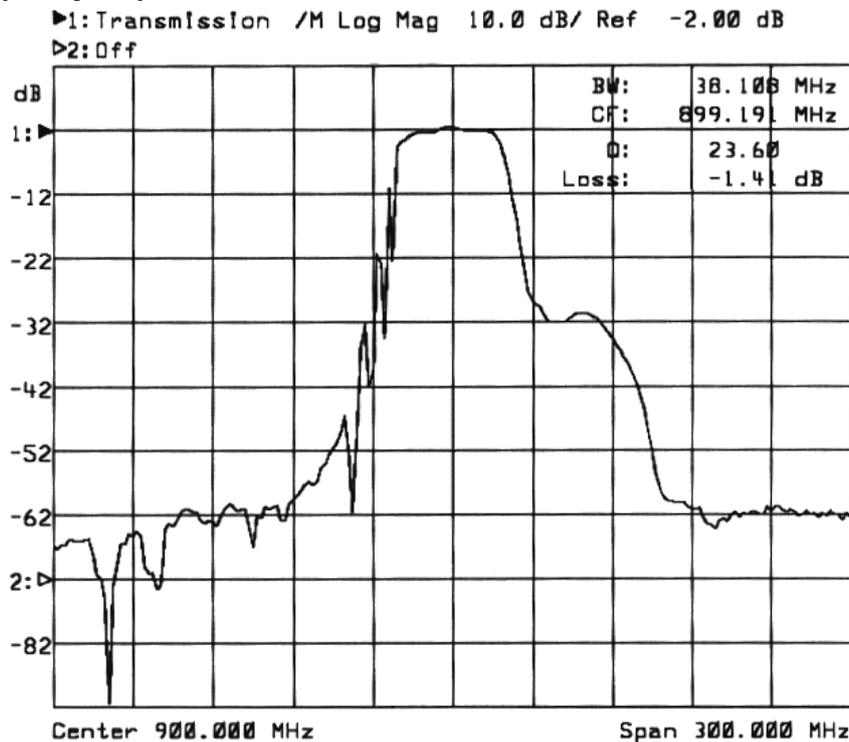

5. Performance

5-1. Maximum Ratings

Rating		Value	Unit
Input Power Level	P_{IN}	10	dBm
DC Voltage	V_{DC}	12	V
Storage Temperature Range	T_{stg}	-40 to +85	°C
Operating Temperature Range	T_A	-10 to +65	°C

5-2. Electronic Characteristics

Parameter		Minimum	Typical	Maximum	Unit
Center Frequency	f_C	--	900.000	--	MHz
3dB Bandwidth	BW_3	--	±19	--	MHz
Usable Bandwidth	BW_{USE}	--	±15	--	MHz
Insertion Loss 885.00 MHz 915.00 MHz	IL	--	2.7	3.6	dB
Amplitude Variation (p-p) 885.00 MHz 915.00 MHz	$\Delta \alpha$	--	1.0	1.8	dB
Absolute Attenuation DC 840.00 MHz 930.00 MHz 990.00 MHz 990.00 MHz 2000.0 MHz	α	48 20 48	57 28 58	-- -- --	dB
Input / Output Impedance		50			Ω

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

© NEDI 2003. All Rights Reserved.

- The frequency f_C is defined as the midpoint between the 3dB frequencies.
- Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 Ω test system with VSWR≤1.2:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_C . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
- Unless noted otherwise, specifications apply over the entire specified operating temperature range.
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
- Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com