


The **NDF9143** is a low-loss, compact, and economical surface-acoustic-wave (SAW) RF filter in a surface-mount ceramic **DCC6C** case with center frequency **1960.000 MHz**.

1. Package Dimensions (DCC6C)

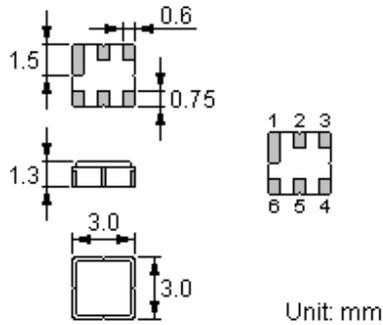


Pin	Configuration
2	Input
5	Output
1, 3, 4, 6	Case Ground

2. Marking


**NDF
9143**

Laser Marking

3. Test Circuit

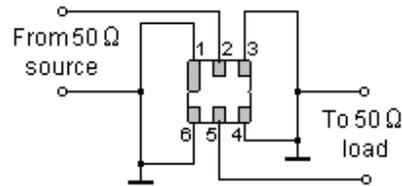

4. Typical Frequency Response

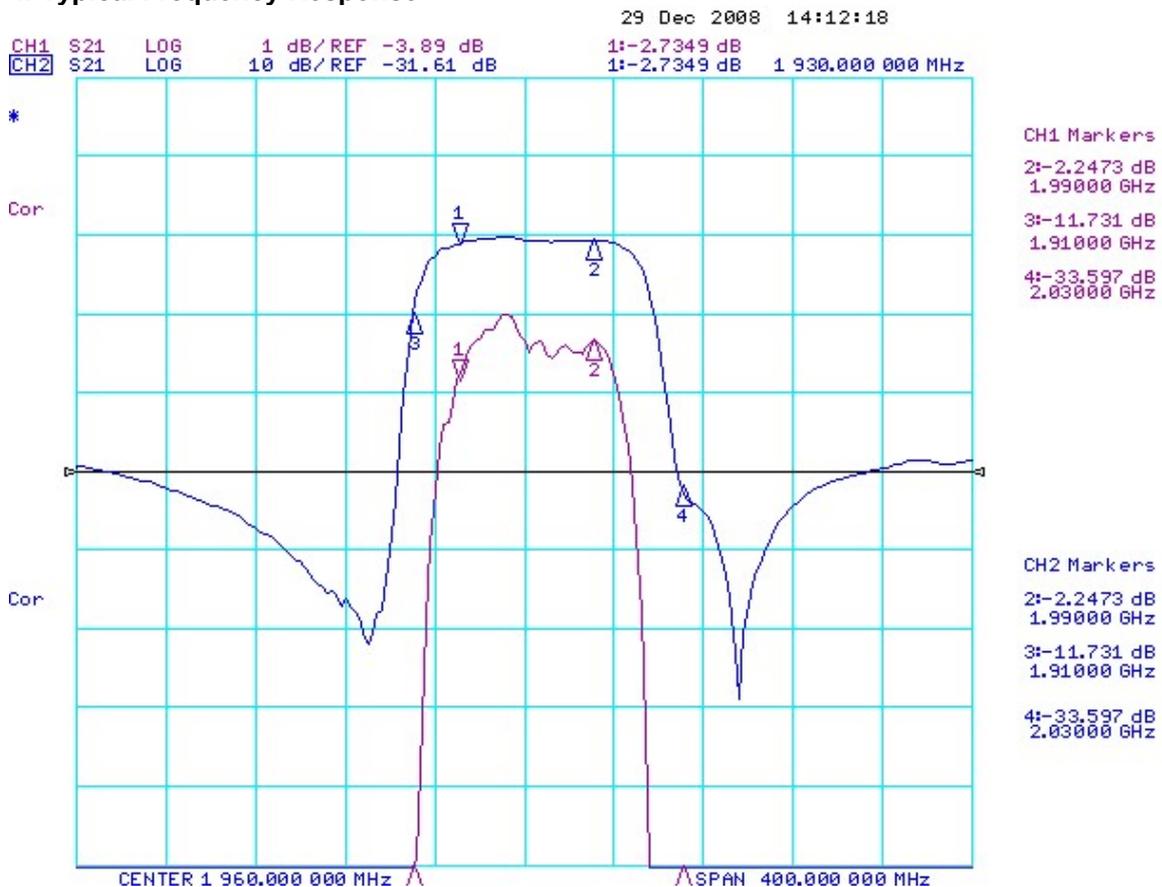

5. Performance

5-1. Maximum Ratings

Rating		Value	Unit
Input Power Level	P	5	dBm
DC Voltage	V_{DC}	0	V
Operable Temperature Range	T_A	-40 to +85	°C
Storage Temperature Range	T_{stg}	-40 to +85	°C

5-2. Electronic Characteristics

Characteristic		Minimum	Typical	Maximum	Unit
Center Frequency	f_C	--	1960.00	--	MHz
Insertion Loss	IL	--	2.5	3.5	dB
	1930 1990 MHz				
Absolute Attenuation	α				
	50 1850 MHz	20	30	--	dB
	1850 1910 MHz	8	15	--	dB
	2030 2080 MHz	25	35	--	dB
	2080 3700 MHz	20	25	--	dB
Amplitude Ripple (p-p)	$\Delta\alpha$				
	1930 1990 MHz	--	1.0	1.5	dB
Input / Output Impedance		50			Ω

ⓘ CAUTION: Electrostatic Sensitive Device. Observe precautions for handling!

© NEDI 2008. All Rights Reserved.

1. The frequency f_C is defined as the midpoint between the 3dB frequencies.
2. Unless noted otherwise, all measurements are made with the filter installed in the specified test fixture that is connected to a 50 Ω test system with VSWR \leq 2.5:1. The test fixture L and C are adjusted for minimum insertion loss at the filter center frequency, f_C . Note that insertion loss, bandwidth, and passband shape are dependent on the impedance matching component values and quality.
3. Unless noted otherwise, specifications apply over the entire specified operating temperature range.
4. The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
5. All equipment designs utilizing this product must be approved by the appropriate government agency prior to manufacture or sale.
6. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
7. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com