



Features

- Low-loss RF filter for digital video
- Impedance transformation from 200 Ohm to 50 ohm
- Ceramic package for Surface Mounted Technology (SMT)
- Usable passband 60.0 MHz
- Lead-free production and RoHS compliant

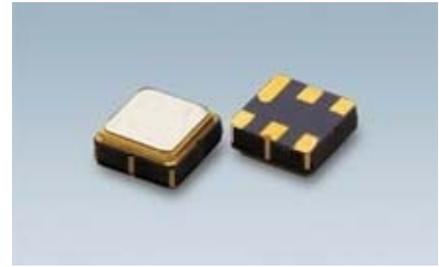

Package Dimensions

Ceramic Package: **DCC6C**

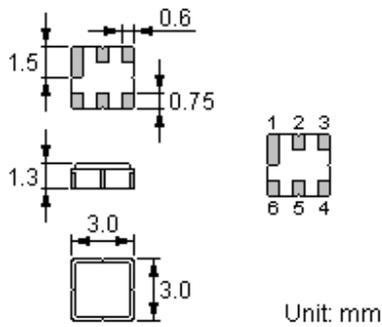

Pin Configuration

4,6	Input balanced
2	Output unbalanced
1, 3, 5	Ground

Marking



Top View, Laser Marking

- "ND": Manufacturer's mark
- "F": SAW filter
- "9325": Part number
- ".": Terminal 1
- "*": Lot number (The code shown below varies in a 4-year cycle)

Code	1	2	3	4	5	6	7	8	9	10	11	12
2012	n	p	q	r	s	t	u	v	w	x	y	z
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z
2015	a	b	c	d	e	f	g	h	i	j	k	m

Maximum Ratings

Rating		Value	Unit
Input Power Level	P	0 max	dBm
DC Voltage	V_{DC}	0	V
Operating Temperature Range	T_A	-40 ~ +85	°C
Storage Temperature Range	T_{stg}	-40 ~ +85	°C

Electrical Characteristics


Temperature range for specification: T = -40 °C to +85 °C
 Terminating source impedance: ZS = 200Ω (balanced) and matching network
 Terminating load impedance: ZL = 50Ω

Item	Minimum	Typical	Maximum	Unit
Center Frequency f_c		1420.0		MHz
Insertion Loss IL				
1390.0 ... 1450.0 MHz	--	2.6	3.6	dB
Amplitude ripple in any 30MHz band (p-p)		1.2	2.0	dB
Differential to common mode ratio (ISdd21/Scd21) 1390.0 ... 1450.0 MHz	18.0	21.0		dB
Absolute Attenuation α				
50.0 ... 900.0 MHz	45	48		dB
1180.0 ... 1240.0 MHz	32	35		dB
1650.0 ... 1710.0 MHz	29	32		dB
1710.0 ... 2070.0 MHz	31	34		dB
2070.0 ... 5000.0 MHz	20	25		dB
Group delay ripple 1390.0 ... 1450.0 MHz		15	30	ns
Input Return Loss				
1390.0 ... 1450.0 MHz	6.0	8.0		dB
Output Return Loss				
1390.0 ... 1450.0 MHz	6.0	8.0		dB


 **RoHS Compliant**

 **Electrostatic Sensitive Device**

Typical Frequency Response

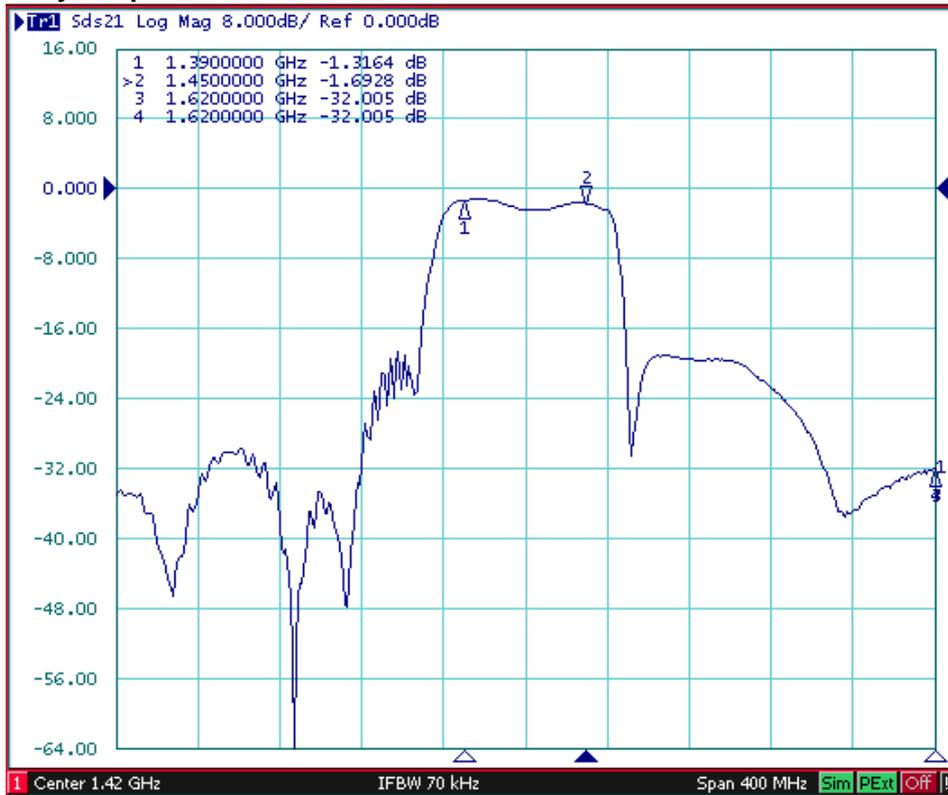

Wide Band Response

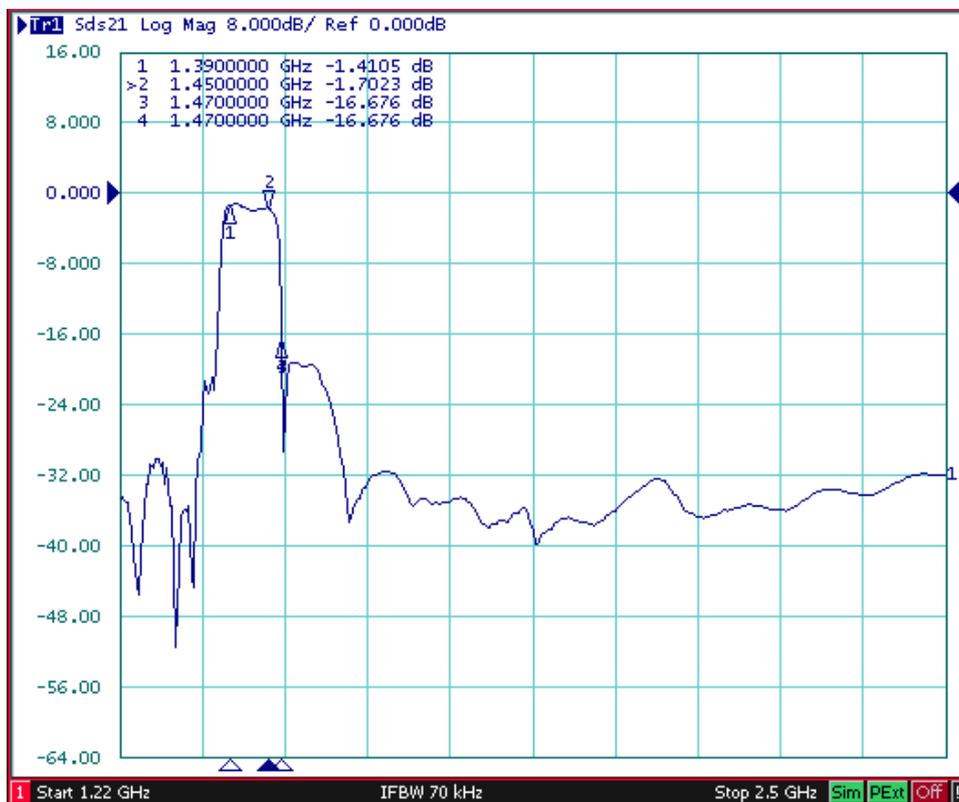

Stability Characteristics


	Test item	Condition of test
1	Mechanical shock	(a) Drops: 3 times on concrete floor (b) Height: 1.0 m
2	Vibration resistance	(a) Frequency of vibration: 10~55Hz (c) Directions: X,Y and Z (b) Amplitude: 1.5 mm (d) Duration: 2 hours
3	Moisture resistance	(a) Condition: 40°C, 90~95% R.H. (c) Wait 4 hours before measurement (b) Duration: 96 hours
4	Climatic sequence	(a) +70°C for 16 hours (c) -25°C for 2 hours (e) Wait 4 hours before measurement (b) +55°C for 24 hours, 90~95% R.H. (d) +40°C for 24 hours, 90~95% R.H.
5	High temperature exposure	(a) Temperature: 70°C (c) Wait 4 hours before measurement (b) Duration: 250 hours
6	Thermal impact	(a) +70°C for 30 minutes ⇒ -25°C for 30 minutes repeated 3 times (b) Wait 4 hours before measurement

Requirements: The SAW filter shall remain within the electrical specifications after tests.


Remarks

- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

Test Circuit

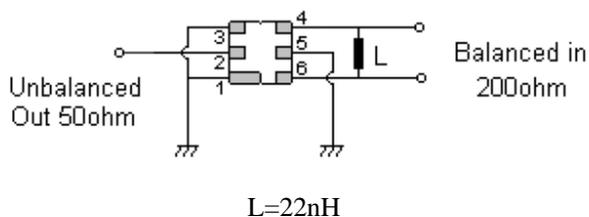


Recommended Land Pattern

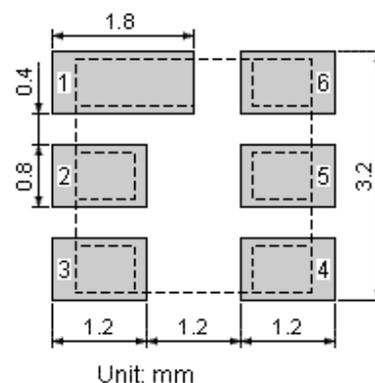


Packing Information

Carrier Tape

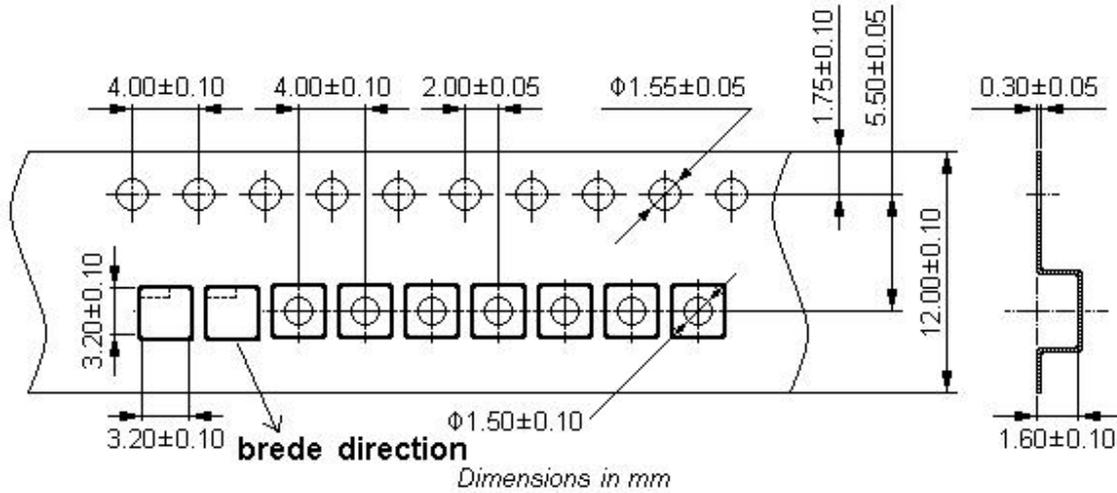

Reel Dimensions

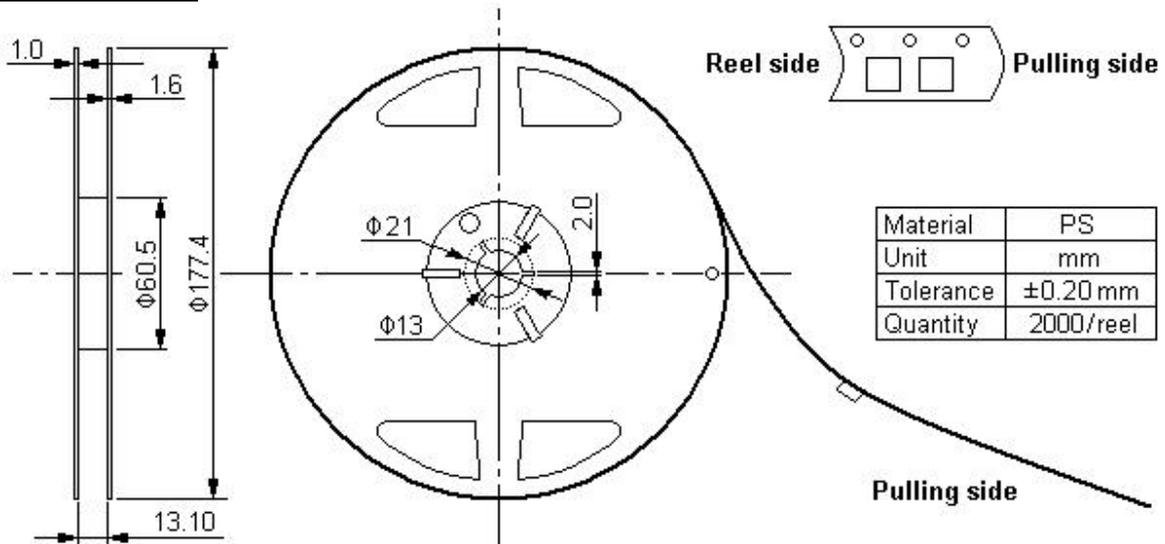


Outer Packing

Type	Quantity	Dimension	Description	Weight
Carton Box I	10000	190x190x95	anti-static plastic bag & carton box 1 reel / bag	0.85
Carton Box II	20000	190x190x190	5 bags / box (10000 pcs) 10 bags / box (20000 pcs)	1.80

Unit: mm

Unit: kg

Recommended Soldering Profile

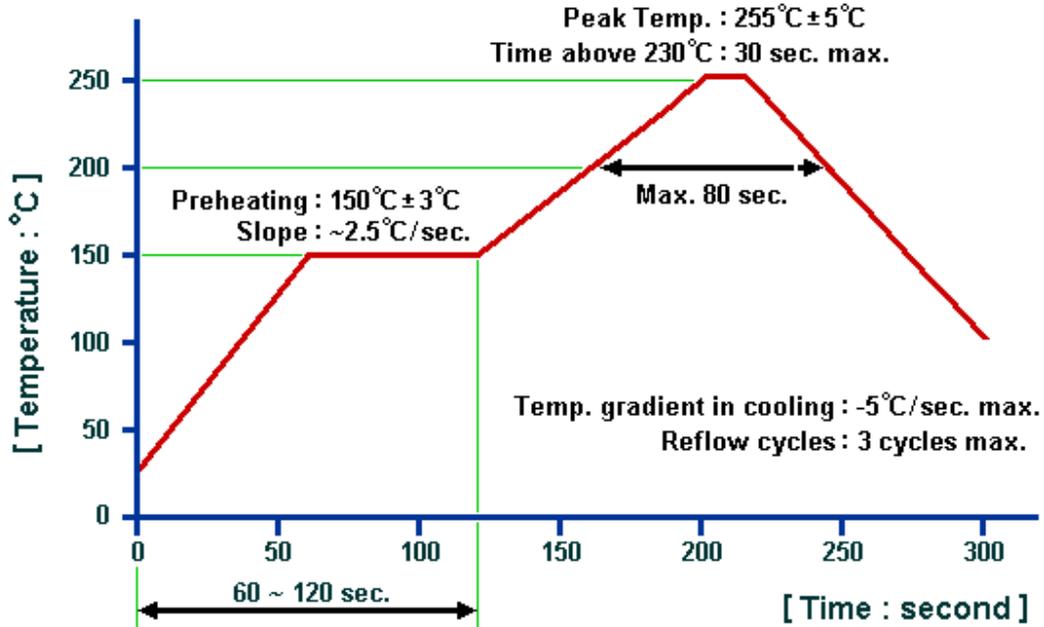

© NEDI 2012. All Rights Reserved.

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
4. For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com