
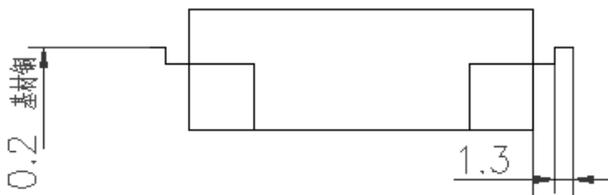


Features

- Microwave Circulators and Isolators for base station
- Metal Package for **drop in**
- Lead-free Production and **RoHS** Compliance

Package Dimensions

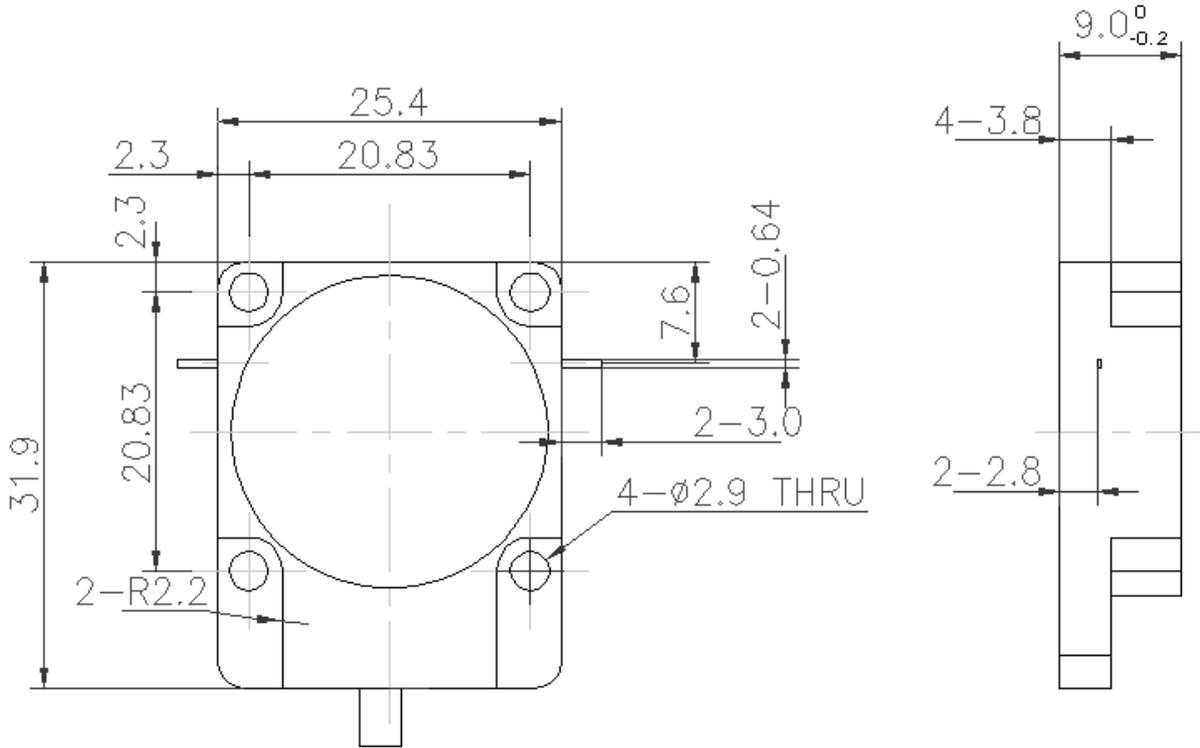

引脚材料：基材铜，同时保证引脚可焊性

<p style="text-align: center;">Marking</p> <p style="text-align: center;">****</p> <p style="text-align: center;">O ← I</p> <p style="text-align: center;">2110-2170MHz</p> <p style="text-align: center;">NDI9016</p>	Top View, Laser Marking					
	"ND":	Manufacturer's mark			"I":	Isolator
	"9016":	Part number				
	"I"	IN	"O"	OUT	⇒	Conduct Direction
	"	2110-2170MHz : operating Frequency Range				
	" * ":	Lot number (the first two numbers of years and the last two numbers of weeks)				

Maximum Ratings

Rating		Value	Unit
Average Power	P_{AVG}	150	W
Reverse Power	P	150	W
Operating Temperature Range	T_A	-40 ~ +90	°C
		+90 ~ +100°C 功率容量不降低, 其他指标可降低 10%, 长期工作可靠性不降低	
Storage Temperature Range	T_{stg}	-55 ~ +125	°C
CPK		1.33	
IFR Intrinsic Failure Rate, FITs		<5	FIT

Electrical Characteristics

Reference temperature: $T_A = 25\text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50\ \Omega$
 Terminating load impedance: $Z_L = 50\ \Omega$

Characteristic		Min.	Typ.	Max.	Unit
Working frequency	f_C	2110		2170	MHz
Insertion attenuation	IL	—		0.2	dB
Isolation	2110~2170MHz	25 (30dB)	30	—	dB
IMD(2X40W, 1MHz space)		75			dBc
Input Return Loss		23	26		dB
Output Return Loss		23	26		dB

 **RoHS Compliant**
 **Electrostatic Sensitive Device**

© NEDI 2016. All Rights Reserved.

Our liability is only assumed for the circulator and isolator component(s) per se, not for applications, processes and circuits implemented within components or assemblies.

For questions on technology, prices and delivery, please contact our sales offices or e-mail winnsky@winnsky.com