



**Features**

- Low-loss RF filter for digital television
- Ceramic Package for **Surface Mounted Technology (SMT)**
- Lead-free Production and **RoHS Compliance**

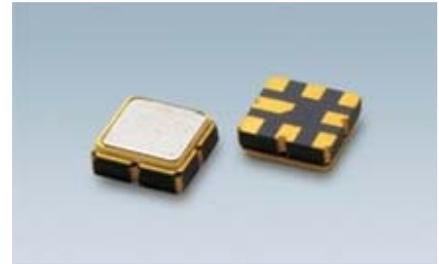

**Package Dimensions**

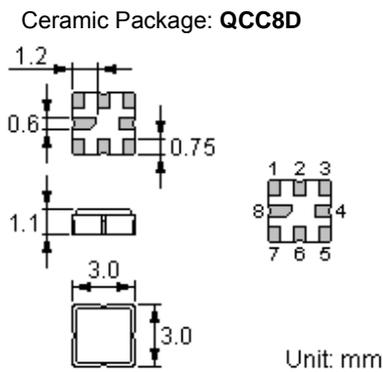

**Pin Configuration**

5,7	Input
2	Output
1,3,6	To Be Grounded
4, 8	Case Ground

**Marking**



Top View, Laser Marking

- "ND": Manufacturer's mark
- "F": SAW filter
- "9291": Part number
- ".\*": Terminal 1
- "\*": Lot number (The code shown below varies in a 4-year cycle)

Code	1	2	3	4	5	6	7	8	9	10	11	12
2011	a	b	c	d	e	f	g	h	i	j	k	m
2012	n	p	q	r	s	t	u	v	w	x	y	z
2013	A	B	C	D	E	F	G	H	J	K	L	M
2014	N	P	Q	R	S	T	U	V	W	X	Y	Z

**Maximum Ratings**

Rating	Value	Unit
Source Power	$P$	0 dBm
DC Voltage	$V_{DC}$	6 V
Operating Temperature Range	$T_A$	-40 ~ +85 °C
Storage Temperature Range	$T_{stg}$	-50 ~ +95 °C

**Electrical Characteristics**


Operating temperature range:  $T = -40\text{ }^{\circ}\text{C} \dots +85\text{ }^{\circ}\text{C}$   
 Terminating source impedance (difference):  $Z_S = 200\ \Omega // 39\text{nH}$   
 Terminating load impedance (difference):  $Z_L = 50\ \Omega$

Characteristic		Min.	Typ.	Max.	Unit
<b>Nominal frequency</b>	$f_c$	—	1210.0	—	MHz
<b>Maximum insertion attenuation <math>\alpha_{max}</math></b> 1180 ... 1240MHz	$IL$	—	4.8	6.0	dB
<b>Amplitude ripple (p-p)</b> 1180 ... 1240MHz	$\Delta\alpha$	—	0.8	2.0	dB
<b>Pass bandwidth at -2dB</b>	$\Delta\alpha$	60	93	-	MHz
<b>I/O VSWR</b> 1180 ... 1240MHz		—	1.5	2.5	
<b>Relative attenuation (relative to <math>\alpha_{max}</math>)</b>	$\alpha$				
50.0 ... 1100.0MHz		42	50		dB
1325 ... 2500 MHz		40	44		dB
2500 ... 3000 MHz		30	39		dB
3000 ...6000 MHz		22	28		dB

**RoHS Compliant**



**Electrostatic Sensitive Device**

**Measurement circuit**


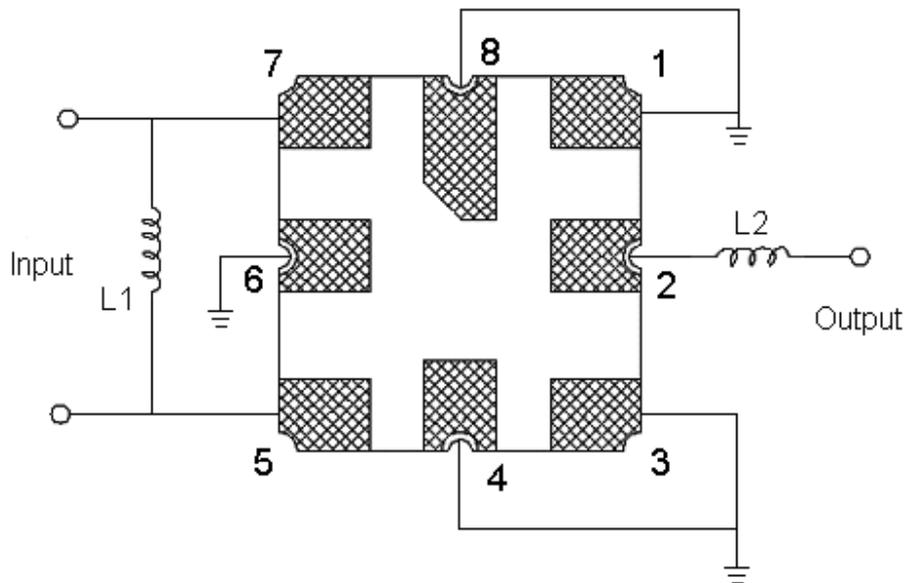



**L1=39nH    L2=4nH**

Typical Frequency Response

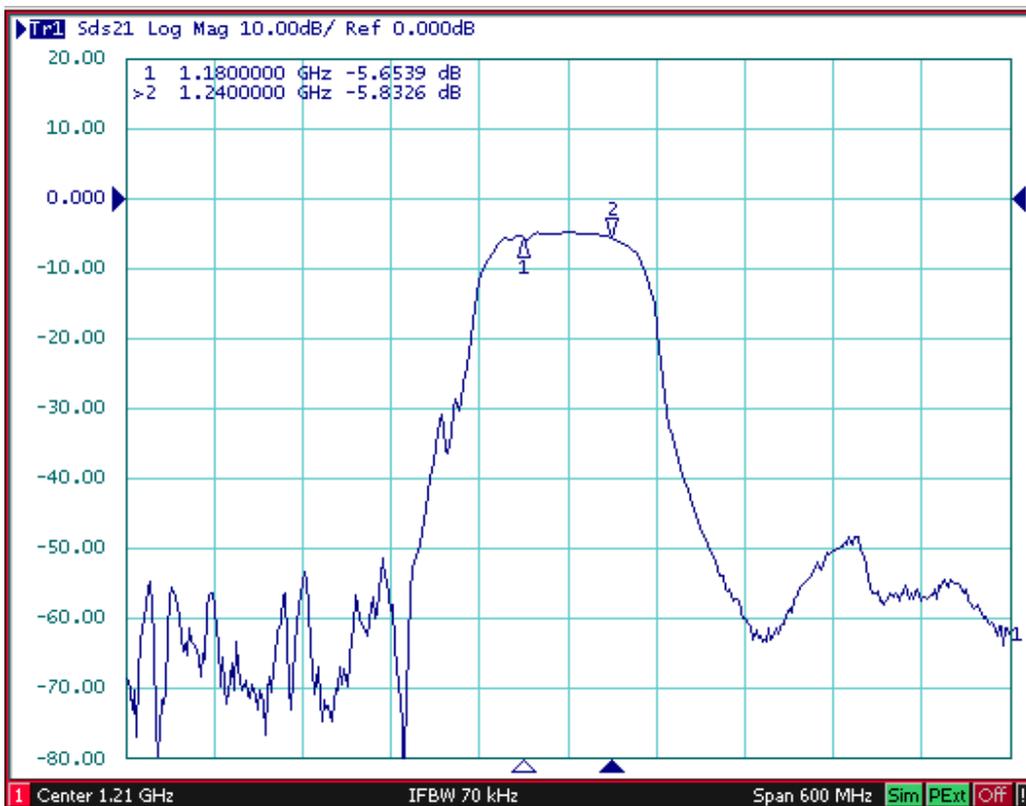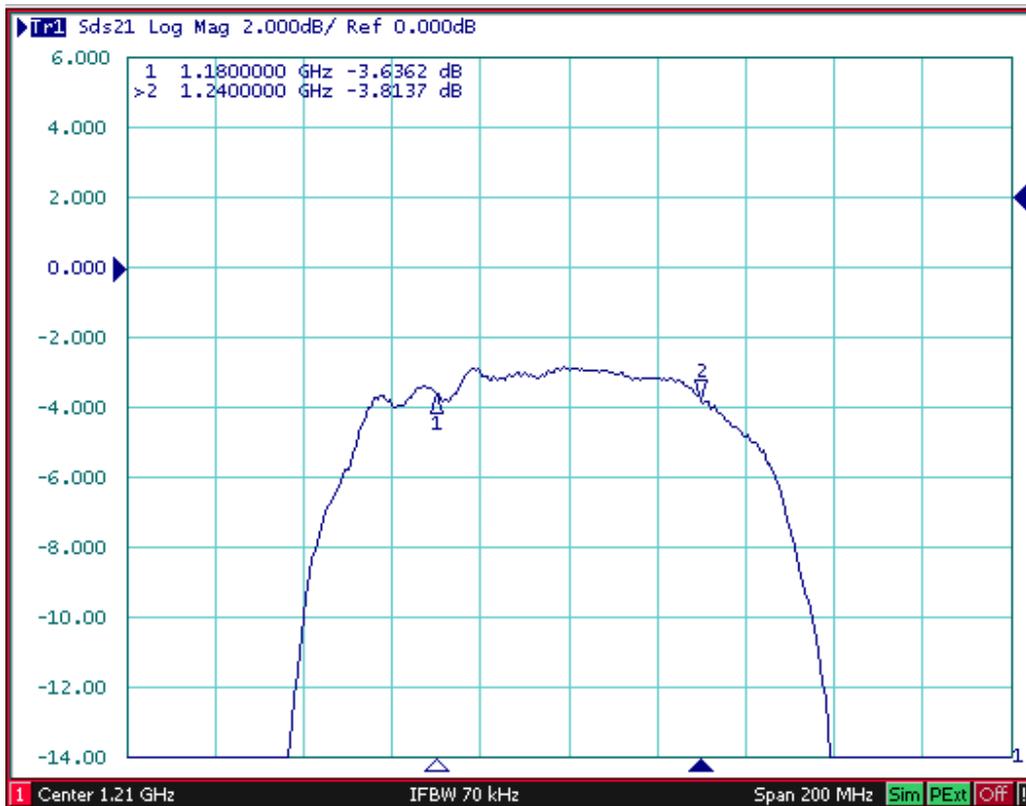

Typical Frequency Response

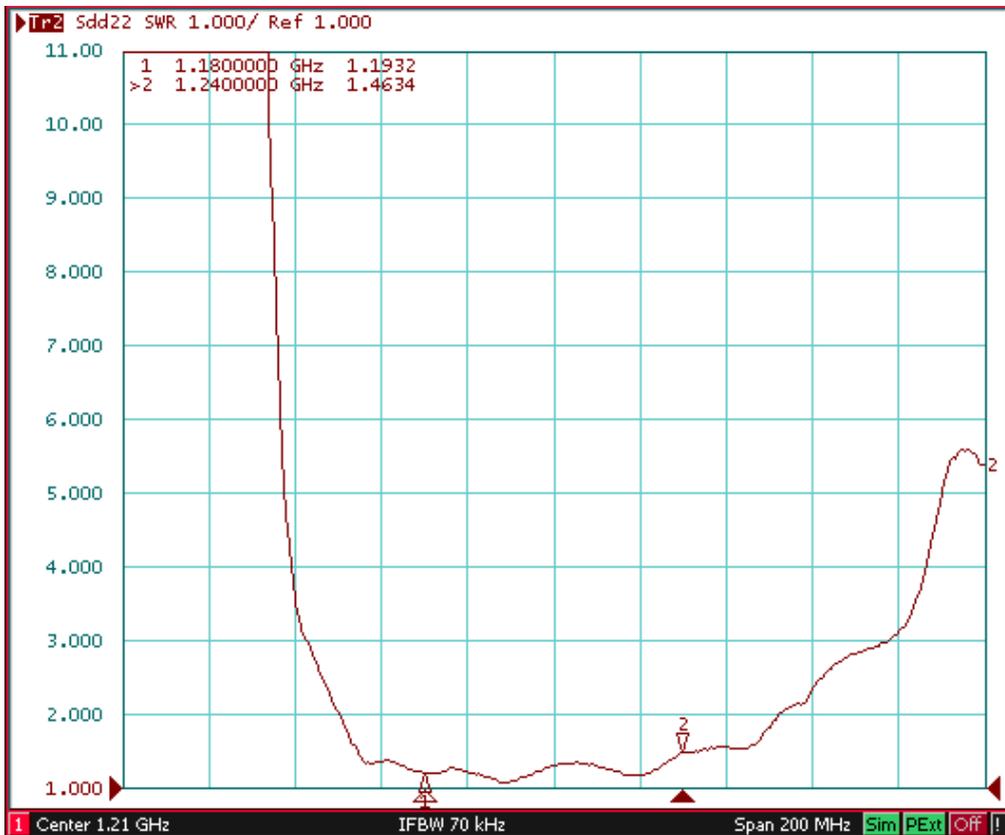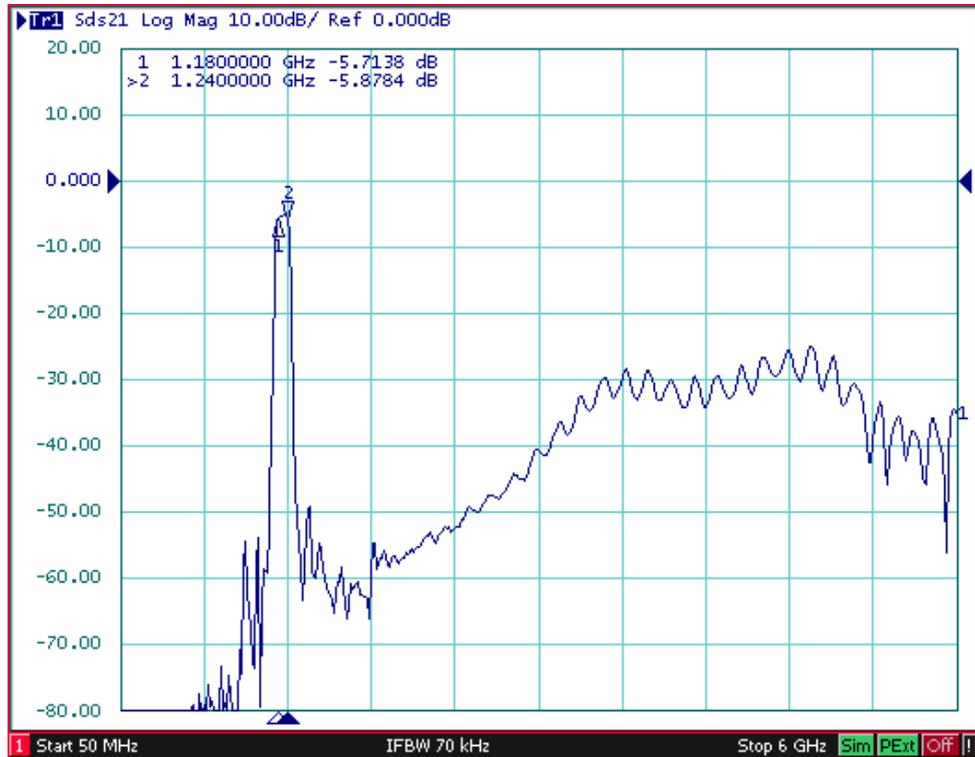

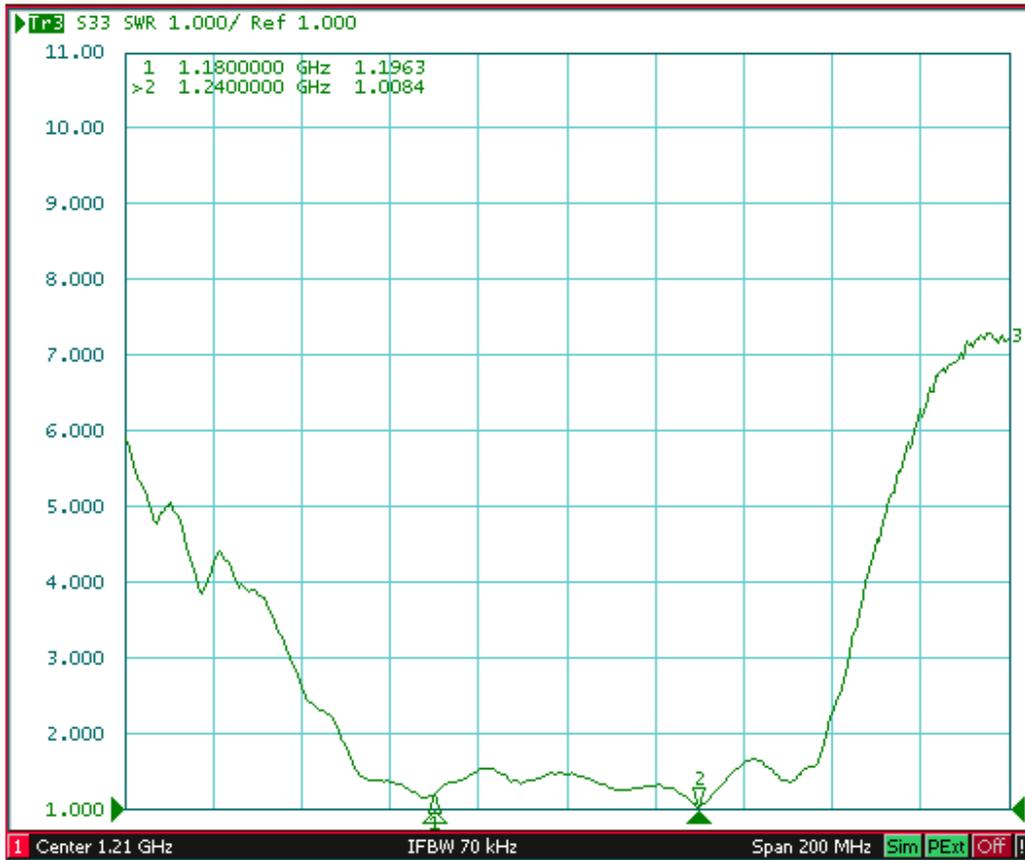

**Stability Characteristics**


	Test item	Condition of test
1	Mechanical shock	(a) Drops: 3 times on concrete floor (b) Height: 1.0 m
2	Vibration resistance	(a) Frequency of vibration: 10~55Hz (c) Directions: X,Y and Z (b) Amplitude: 1.5 mm (d) Duration: 2 hours
3	Moisture resistance	(a) Condition: 40°C, 90~95% R.H. (c) Wait 4 hours before measurement (b) Duration: 96 hours
4	Climatic sequence	(a) +70°C for 16 hours (c) -25°C for 2 hours (e) Wait 4 hours before measurement (b) +55°C for 24 hours, 90~95% R.H. (d) +40°C for 24 hours, 90~95% R.H.
5	High temperature exposure	(a) Temperature: 70°C (c) Wait 4 hours before measurement (b) Duration: 250 hours
6	Thermal impact	(a) +70°C for 30 minutes ⇒ -25°C for 30 minutes repeated 3 times (b) Wait 4 hours before measurement

**Requirements:** The SAW filter shall remain within the electrical specifications after tests.

**Remarks**


- SAW devices should not be used in any type of fluid such as water, oil, organic solvent, etc.
- Be certain not to apply voltage exceeding the rated voltage of components.
- Do not operate outside the recommended operating temperature range of components.
- Sudden change of temperature shall be avoided, deterioration of the characteristics can occur.
- Be careful of soldering temperature and duration of components when soldering.
- Do not place soldering iron on the body of components.
- Be careful not to subject the terminals or leads of components to excessive force.
- SAW devices are electrostatic sensitive. Please avoid static voltage during operation and storage.
- Ultrasonic cleaning shall be avoided. Ultrasonic vibration may cause destruction of components.

**Recommended Land Pattern**

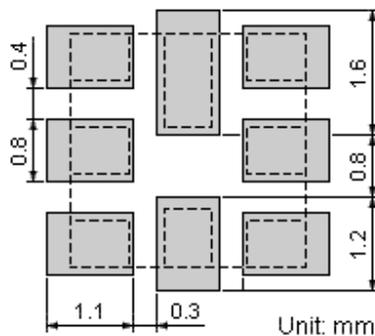


**Packing Information**

Carrier Tape

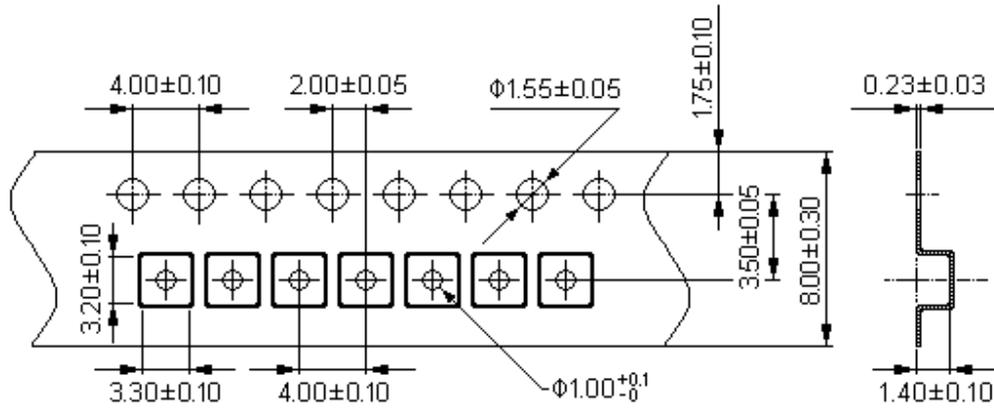

Dimensions in mm

Reel Dimensions

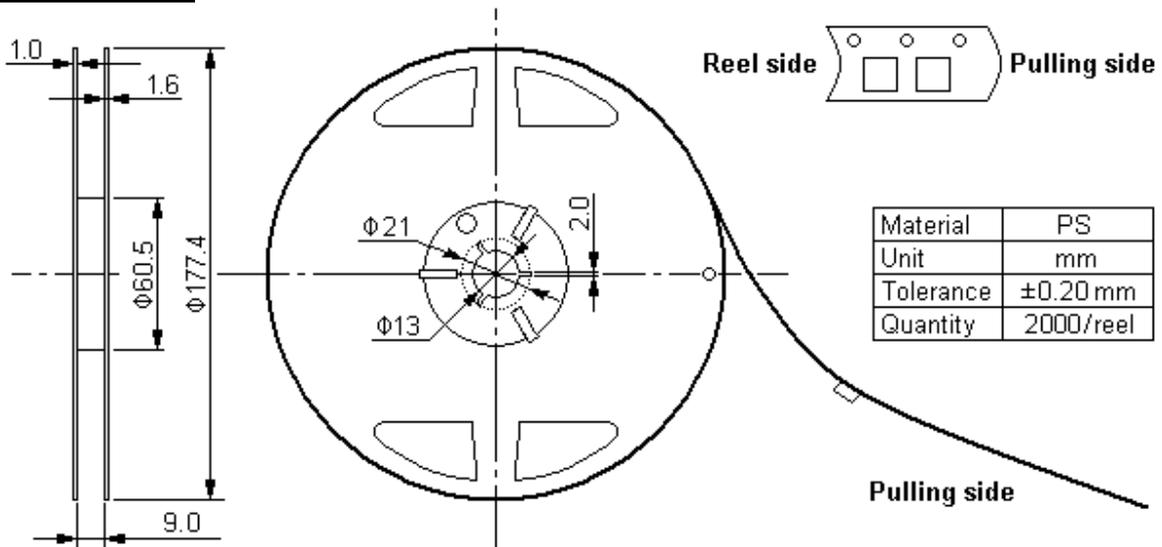

Material	PS
Unit	mm
Tolerance	±0.20 mm
Quantity	2000/reel


Outer Packing

Type	Quantity	Dimension	Description	Weight
Carton Box I	10000	190×190×95	anti-static plastic bag & carton box 1 reel / bag	0.85
Carton Box II	20000	190×190×190	5 bags / box (10000 pcs) 10 bags / box (20000 pcs)	1.70

Unit: mm

Unit: kg

**Recommended Soldering Profile**

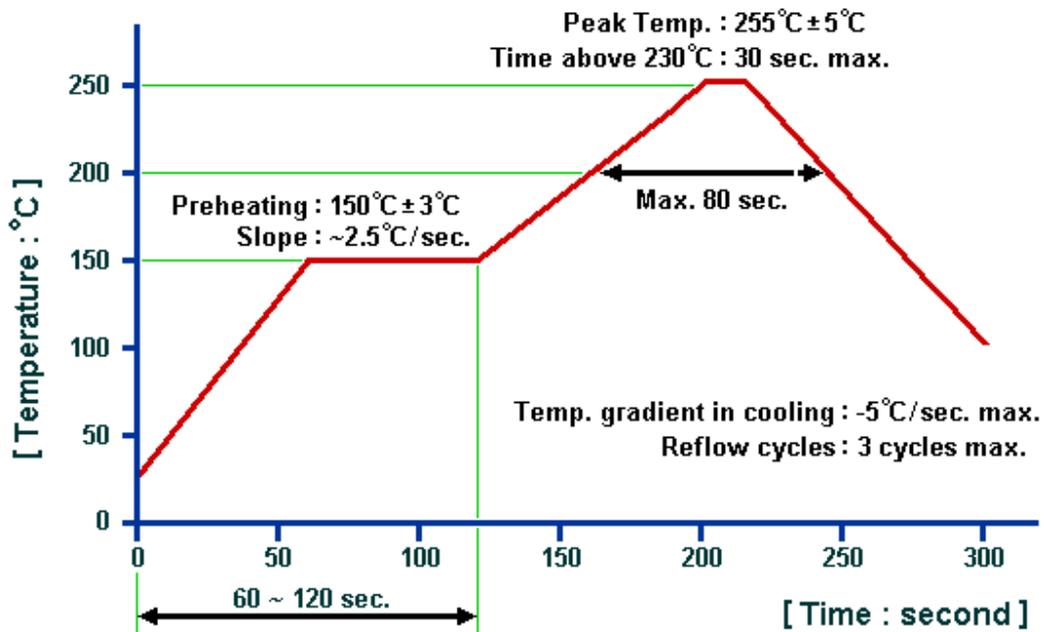

© NEDI 2012. All Rights Reserved.

1. The specifications of this device are subject to change or obsolescence without notice.
2. Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
3. Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
4. For questions on technology, prices and delivery, please contact our sales offices or e-mail [winnsky@winnsky.com](mailto:winnsky@winnsky.com)